

Options and Accessories



Canopy Top
Black



Certified ROPS
Cab Enclosure



Custom Van Box



Fold-Down Seat



Electric Bed Lift



Heavy-Duty
Brush Guard



Toolbox



2-Inch Front
Receiver Hitch



Stake-Side
Kit



1,500 lb Winch



Pintle Hitch



Cab Heater



Nerf Bars



Light Bar



Swisher Trailmower



Swisher Dump Cart



50-Gallon Sprayer



54- or 62-Inch
Plow Blade



Safety Strobe Light

Club Car

CARRYALL 272

UTILITY VEHICLE



Ingersoll Rand is a world leader in the field of compact vehicles and equipment. Our widely known Bobcat® brand includes an extensive line of powerful, nimble compact construction equipment and attachments, and our state-of-the-art engineering capabilities and stylish designs are reflected in our world famous Club Car® vehicles.

1.800.CLUBCAR • +1 706.863.3000

www.clubcar.com www.ingersollrand.com

CCN 18033068 Rev 08/06



CARRYALL 272

Tough jobs require a tough engine. Club Car's 400 cc engine, available on the Carryall 272, gives you the power you need with higher torque and more hill-climbing power. In addition, its shift-on-the-fly differential lock offers extra traction on



demand, enabling you to put it to work in a variety of more challenging environments.


Features

400 cc, 13 hp gas, key-start engine



Standard Color: Dark Gray

Optional Colors: Beige, Gray, Green, White, Classic Blue, Red, Black and Burgundy



Rugged, rustproof aluminum frame, chassis and cargo box




15.3 ft³ (0.4 m³) cargo box carries 800 lb (363.2 kg)



Trailer hitch



Dual-circuit, four-wheel, hydraulic brakes

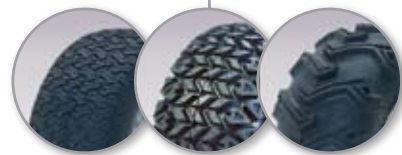

Choice of heavy-duty all-terrain, turf or mud tires



Smooth, independent A-arm front suspension; semi-independent rear suspension

Additional Features

- Maximum speed of 19 mph (30.6 kph)
- 1,200 lb (544.8 kg) total vehicle capacity
- Maximum hp @ 3,600 rpm exceeds SAE J1940 Performance Standards
- 11.4 in (29 cm) ground clearance under foot platform to handle rough terrain
- Shift-on-the-fly differential lock

Specifications

Carryall 272 Gasoline

POWER SUPPLY		
Engine		400 cc, Kawasaki Gasoline Key-Start Engine
Horsepower		13*
Governor		Automatic ground speed sensing, internally geared-in unitized transaxle
Governed RPM		3,800+/-30
Ignition		Electronic w/electronic rpm limiter
Drive Unit		Unitized transaxle, helical gears:15.0:1 forward,20.6:1 reverse
Electrical System		12-volt, 500 CCA 105 min. reserve
STEERING/ SUSPENSION		
Steering		Self-adjusting rack & pinion
Front Suspension		Independent A-arms with coil over shocks
Rear Suspension		Leaf springs with dual hydraulic shocks
Brakes		Self-adjusting, dual circuit four-wheel hydraulic drum
Park Brake		Hand-operated, multi-lock
Stabilizer Bar		No
FRAME/CHASSIS		
Frame/Chassis		Aluminum I-Beam
Front Body		ABS/DR-Acrylic laminate
Rear Body		All aluminum
Body Finish		Molded-in color
Light Package		Headlights only package
Trailer Hitch		Standard
Front Tires		23 x 10.50-12,4-ply rated, All-terrain tread
Rear Tires		23 x 10.50-12,4-ply rated, All-terrain tread
Instrumentation		Electronic fuel gauge/hour meter, low-oil warning light
DIMENSIONS		
Cargo Box Size		48.8" x 49.8" x 9.3" (123.8 cm x 126.4 cm x 23.5 cm)
Flat Bed Size		46.9" x 48.3" (119.1 cm x 122.7 cm)
Bed Height		31.1" (79.0 cm)
Bed Capacity		800 lb (363.2 kg)
Total Vehicle Capacity		1,200 lb (544.8 kg)
Overall Length		120" (304.8 cm)
Overall Width		54.0" (137.2 cm)
Overall Height		51.0" (129.5 cm)
Wheelbase		80.0" (203.2 cm)
Ground Clearance Under Differential		6.6" (16.8 cm)
Fuel Tank Capacity		7.0 gallons (26.5 Liters)
Tread		43"/43.5" (109.2 cm/110.5 cm)
Dry Weight Less Batteries		1,045 lb (474.0 kg)
Maximum Speed		19 mph (30.6 kph)
Outside Clearance Circle		23.3 ft (7.1 m) dia.
Turning Radius		11.8 ft (3.6 m)
Intersecting Aisle Radius		90.0" (228.6 cm)
Vehicle Warranty		2-year, limited

*Exceeds SAE J1940 Performance Standards

